

# MOTORIZED U-BOAT



# MOTORIZED U-BOAT



Transaxle can be switched to free-wheel mode when propulsion is not allowed.

Interlock button eliminates unintentional activation of propulsion system.

Open differential transaxle provides 360-degree maneuverability in both propulsion and free-wheel modes.

- Propulsion feature provides assistance for locations with inclines or that cover long distances.
- Improves productivity by maintaining consistent speed throughout a typical delivery
- Propulsion increases efficiency by reducing operator fatigue

MODEL SHOWN  
MBT1621

SPECIFICATIONS	
Deck	18" wide x 60" long
Weight	145 lbs.
Capacity	1,000 lbs.
Handles	48.5" from top of deck
Casters	6" x 2"
Drive wheels	9" x 3.5" solid pneumatic
Speed (fwd & rev)	0-3 mph variable
Voltage	24 Volts DC
Range (continuous/intermittent)	6-9 hours
Recharge time	4-8 hours

## Features



- Sealed-for-life transaxle requires no maintenance
- Push-too-fast safety helps user maintain control on inclines in free-wheel mode
- Motor equipped with regenerative braking, which uses the DC motor to slow the load forward or reverse and returns some of the charge to the batteries
- Throttle automatically returns to zero to stop and locks the load if the operator loses contact
- Automatic park brake engages when throttle is released, even on inclines

# MOTORIZED U-BOAT

## Deck Features



- Engineered for durability, longevity and extreme use
- Center tilt allows easy navigation over thresholds and bumps
- High efficiency tires with proprietary solid-fill material reduce push-and-pull effort in free-wheel mode



*Robotically welded five-box aluminum construction optimized for over-the-road payload.*

## Handle Features



### FIXED DRIVE HANDLE

- Adjustable U-loop handle with throttle provides maximum comfort and steering ability
- Throttle interlock button protected from accidental impact
- Bottom cross brace rests on deck to provide load containment



### REMOVABLE HANDLE


- Modular construction offers service parts versus total handle replacement
- Removable handle allows access to product from three sides
- Bottom cross brace rests on deck to provide load containment

P/N  
460033

# MOTORIZED U-BOAT

## Options

### EXTRA DECK SOCKETS



- Additional interior handle socket position better accommodates smaller cube space
- Same superior maneuverability and capacity as standard deck




### MAG-LOC®



P/N	L"	WT.(LBS.)
302920	5.75	0.15

Mag-Loc anchors safely secure loads when combined with optional safety straps.



P/N	W"	L'	WT.(LBS.)
302960	2	6	1.75
302922	2	12	2.0
302924	2	16	2.2

Cam buckle has 3,000 lb. break strength and 1,000 lb. working load with 6,000 lb. rated weather-resistant polyester webbing.

Note: 6' strap is long enough for one side of U-Boat; 12' & 16' can wrap around load.

## Accessories


### CONTAINMENT CURTAIN



P/N	WT.(LBS.)
306020	4.0

Containment curtain securely holds product in place during transport.


### KEG MOVER

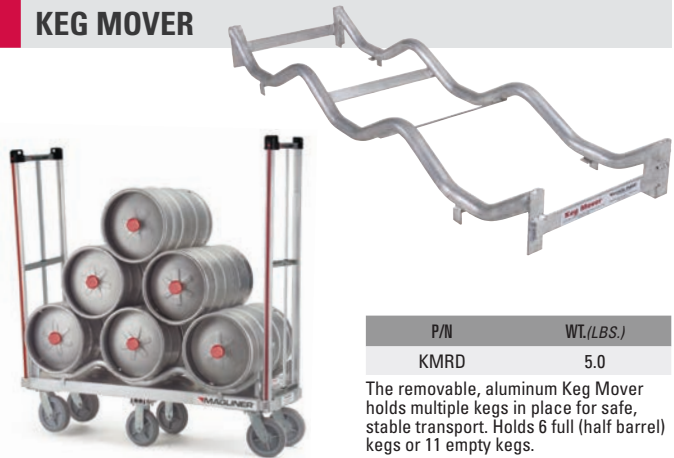

P/N	WT.(LBS.)
KMRD	5.0

The removable, aluminum Keg Mover holds multiple kegs in place for safe, stable transport. Holds 6 full (half barrel) kegs or 11 empty kegs.

### CURB RAMP



Convenient Carrying Handle

P/N	W"	L"	WT.(LBS.)
RDCR	29	44	43.0

The 3,000 pound capacity curb ramp has a 9" height range. The twin-tooth deck design offers a 26" usable width that provides traction in either direction.

**MAGLINER®**

howi.com

House Of Wheels Inc  
7701 W Mossy Cup St | Boise, ID 83709 | USA  
(208) 342.3254  
(208) 342.1531  
info@howi.com